

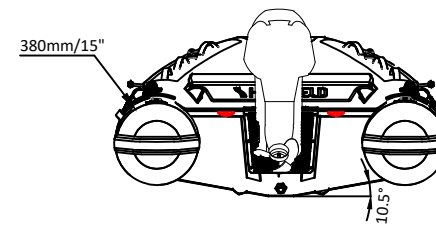


ULTRALITE 260

SPECIFICATIONS

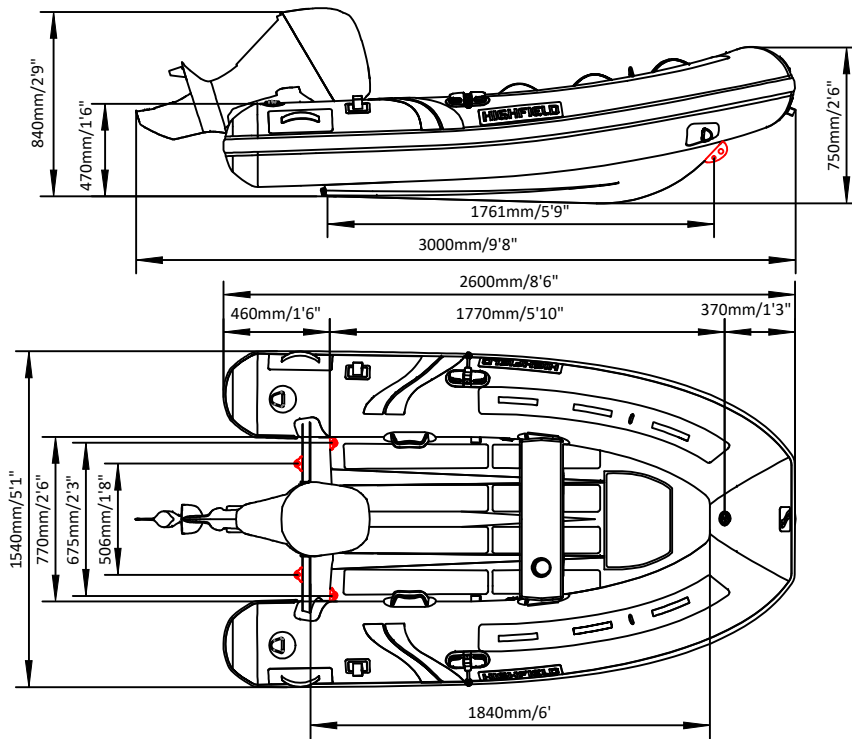

SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice.Tolerances:Dimensions ±2.5% Weight ±5%)

| MODEL | ISO 6185 PART | ISO 6185 | | | | | | | | | | | | | | | Fuel tank Capacity | | Wet Weight (Approximate) 6HP (4.48KW) +Fuel | | AIR CHAMBERS | | | | | | | | |
|-------|---------------|----------|-----|-----|-----|-----|-----|-------|-----------|----|------------|----|----|----|----|----|--------------------|----|---|-----|------------------|----|----|-----|-----|-----|---|------|------|
| | | | KG | LB | # | KG | LB | Shaft | Max power | | Max weight | | KG | LB | KG | LB | KG | LB | L | GAL | | KG | LB | PSI | BAR | | | | |
| | | | | | | | | | KW | HP | KG | LB | | | | | | | | | | | | | | | | | |
| UL260 | 2 | C | 278 | 613 | 3+1 | 263 | 579 | S | 4.48 | 6 | 41 | 90 | 35 | 77 | / | / | / | / | / | / | / | / | / | / | 76 | 168 | 3 | 3.63 | 0.25 |

Weight: boat only.