
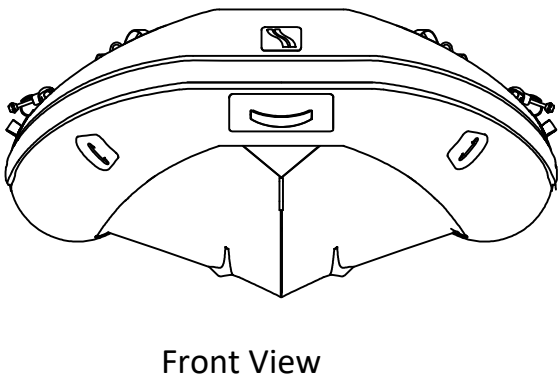
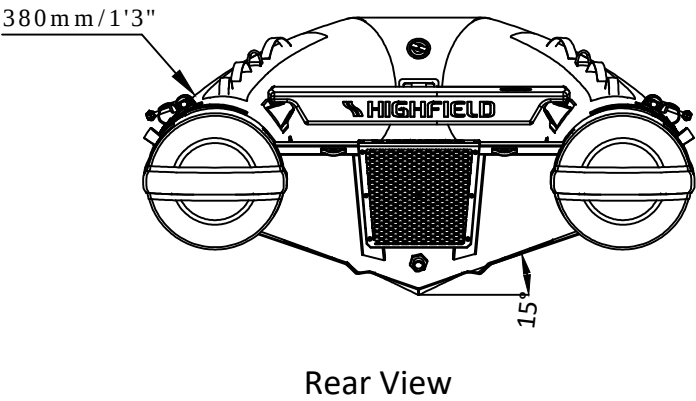
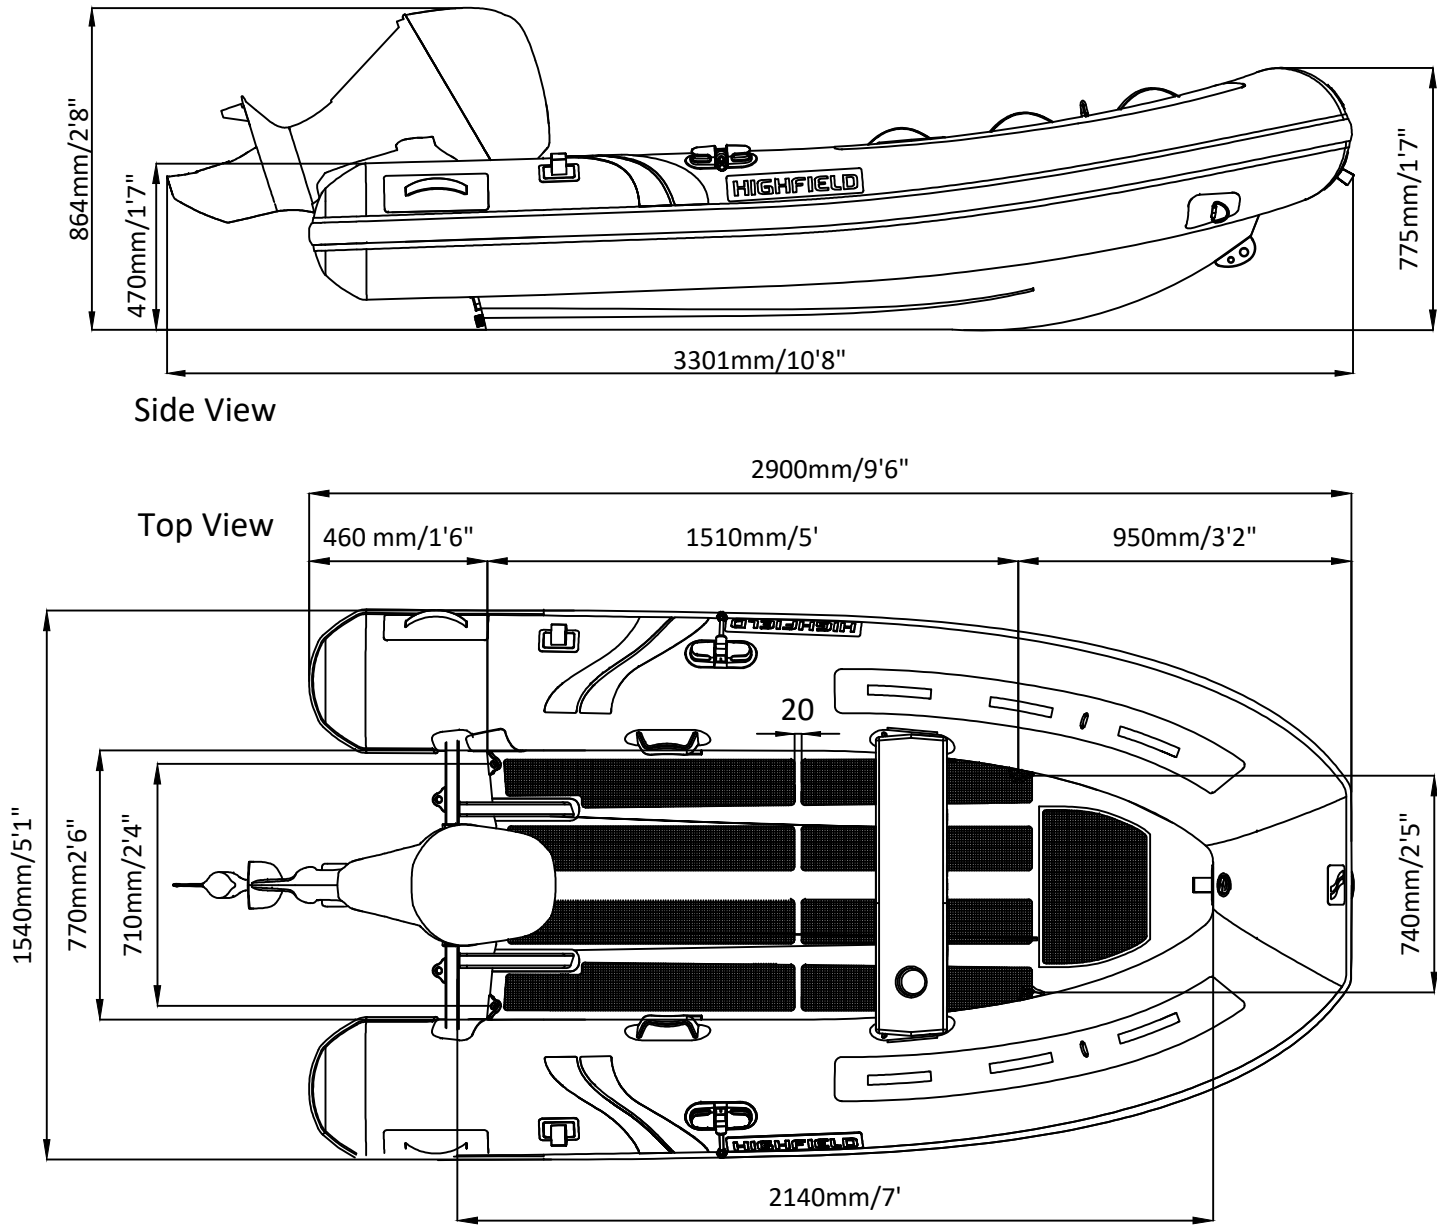


ULTRALITE 290

SPECIFICATIONS





SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice.Tolerances:Dimensions ±2.5% Weight ±5%)


MODEL	ISO 6185 PART	ISO 6185			 Outboard Engine						Molded seat		Oar		Fuel tank Capacity	Rollbar		Wet Weight (Approximate) 10HP (7.46KW) +Fuel 		AIR CHAMBERS						
			KG	LB	#	KG	LB	Shaft	Max power		Max weight		KG	LB	KG	LB	KG	LB	L		KG	LB	KG	LB		
									KW	HP	KG	LB														
UL290	2	C	375	827	4	300	661	S	7.46	10	60	132	39	86	3	6.6	2	4.4	/	/	/	119	262	3	3.63	0.25

ULTRALITE 290LT

SPECIFICATIONS

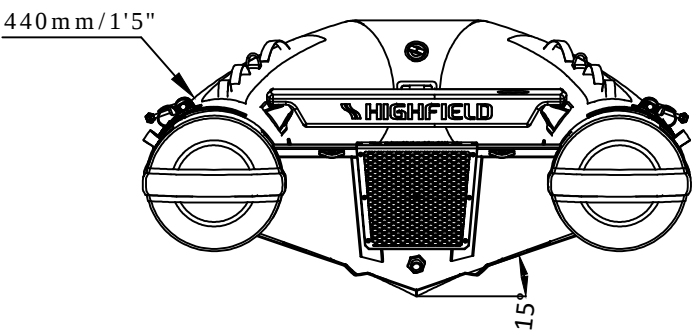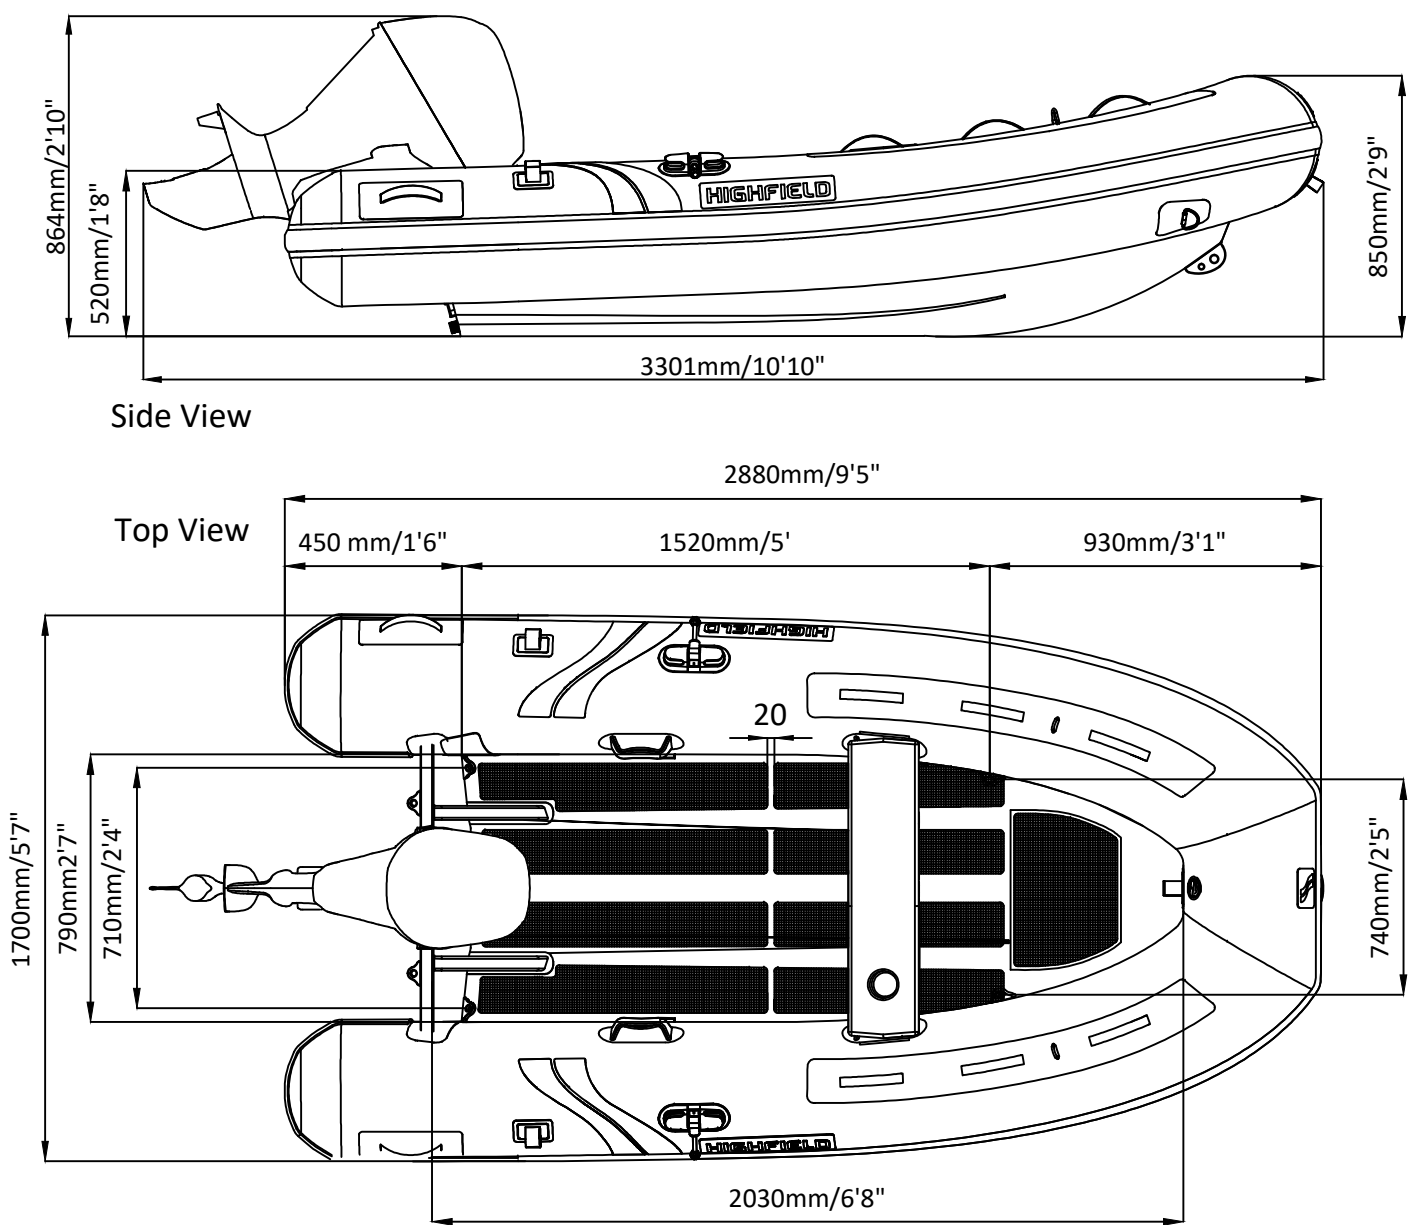

Rear View

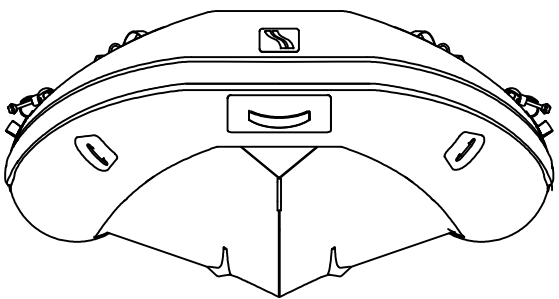

Front View

SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice.Tolerances:Dimensions ±2.5% Weight ±5%)

MODEL	ISO 6185 PART	ISO 6185			 Outboard Engine						Molded seat		Oar		Fuel tank Capacity	Rollbar		 Wet Weight (Approximate) 15HP (7.46KW) +Fuel		AIR CHAMBERS						
			KG	LB	#	KG	LB	Shaft	Max power		Max weight		KG	LB	KG	LB	KG	LB	L		KG	LB	KG	LB		
									KW	HP	KG	LB														
UL290LT	2	C	400	882	4	300	661	S	11.19	15	60	132	43	95	3	6.6	2	4.4	/	/	/	115.3	254	3	3.63	0.25

Weight: Boat only, not including molded seat, oars and other accessories.